

Filtration media Meltblown

Material PM2,5 70%



Filter class acc. to ISO 16890	Particle efficiency	Filter class acc. to EN 779:2012
ISO ePM2,5 70	ePM ₁ 60 %	F7
	ePM _{2,5} 70 %	
	ePM ₁₀ 90 %	

Filter class and efficiency based on ISO testing of a pocket filter 592 x 592 x 600/8ET


Operating conditions:

Max. humidity resistance	100 %
Max. temperature	70 °C
Recommended final pressure drop	300 Pa
Potential nominal air flow (short term usage possible)	1,25 x nominal air flow
Fire behaviour	DIN 53438 - 3 (F1)

Technical data

Filter area	[m ²]	1
Surface weight approx.	[g/m ²]	175
Material thickness approx.	[mm]	4,5
Recommended nominal air flow	[m ³ /h/m ²]	600
Air velocity	[m/s]	0,17
Initial pressure drop	[Pa]	75

Initial pressure drop

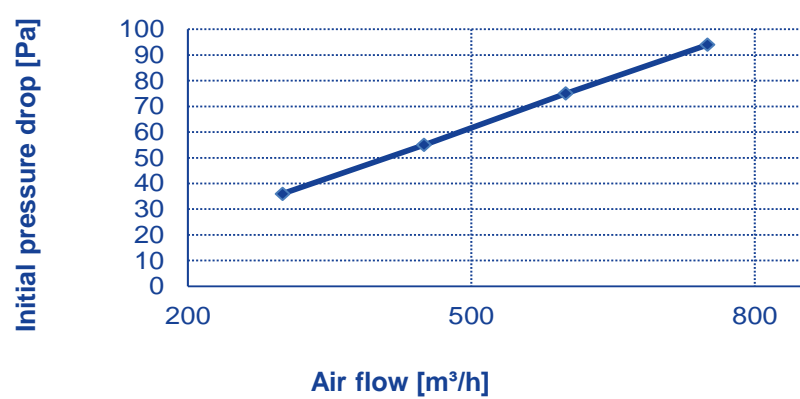

Medium Synthetic-progressive microfiber
Media color Pink



Store in a dry and clean place, protect from moisture and sunlight. Storage temperature between 0 °C and 35 °C. Store the rolls vertically. The maximum relative humidity of the storage conditions is 85%. Storage time max. 2 years from the delivery date. Storage and transport in the original packaging.

Product benefits:

- Multi-layer structure of the filter media
- Shatter-proof synthetic fibres
- Progressive structure ensures full utilisation of the filter media
- BIOSTATIC version ideally to be used when hygiene demands are high and in environments with increased air humidity
- Testing for paint compatibility by Fraunhofer IPA (not valid for the biostatic version)
- For use in air-conditioning and ventilation systems of all kinds as well as in painting technology

Versions:

- Available in rolls
- Also available in the following versions: welded endless pockets, sewn, precuts for finished dimension
- Optional **BIOSTATIC version**: the ingredients located within the synthetic fibers „BIO-Hunter RX-106“ and "Silver-Phosphate-Glass" (BIOZIDE) prevent odors and the formation of microorganisms on the filter which is harmful to the health

- Standard roll length: 150,00 m
- Standard roll width: 1,53 m
- Maximum cut length: 10,00 m